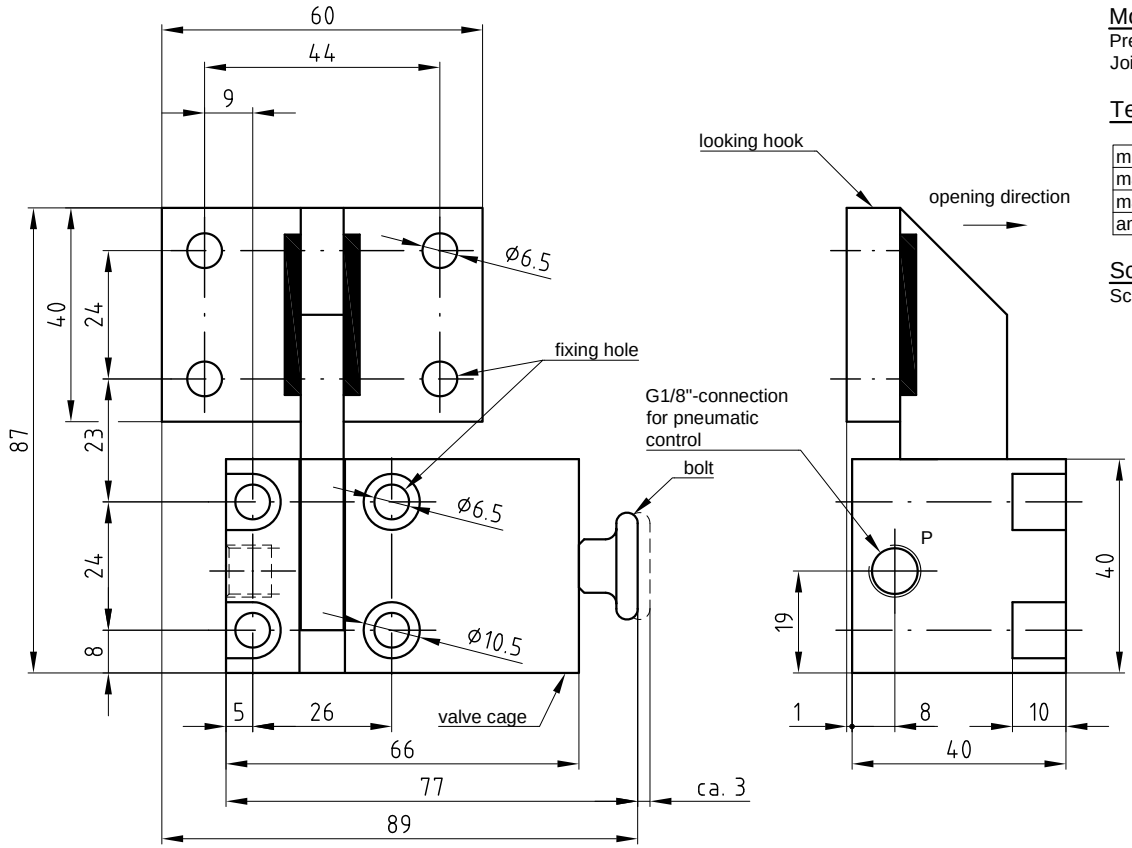

Description of function:

The pneumatic window unlocking device is a locking device, which unlock the locking hook after applying the min. release pressure to the input P. The window opening took place for example by gas-pressure springs.
After releasing the closing took place by hand. When exhaust the input P, the window locking device close and the locking hook can snap into the locking device.

Connections:

P ... remote control

Mounting:

Preferably mount the locking hook on casement and the valve cage on window frame.
Join connection P.

Technical data:

min. unlocking pressure	10 bar
max. operation pressure	60 bar
max. locking force	2000N
ambient temperature range	-25° to +110°C

Scope of supply:

Screw connections are NOT included in the scope of supply and must be ordered separately!

Tolerance Scale 1:1 Material

Created Simetzberger	Sheet 1/2	Format A3	Title Pneumatic window unlocking device PFET	Document Style Data sheet
Approved KW	Issue Date 16.02.2012			Document State Valid
Grasl Pneumatic Mechanik Gmbh QM FO 05.24.0				Document Number 03.011.DAT.03.02-E